

SURF6

LED Aufbauprofil

■ SILBER ■ SCHWARZ RAL 9005



max.
6 mm




MASS-KONFEKTION &
OEM-FERTIGUNG AUF ANFRAGE

Bis 6 m | RAL-Farben


Kühlmasse: 45 g/m | Besonders schmales sowie flaches LED Alu-Profil, das aufgrund seiner Abmessungen (7,8 x 7 mm – b x h) ideal in Fliesenkonzepte integriert werden kann.

Für die Montage im Nass- und Außenbereich: PC-Abdeckung + Kühlstreifen + Silikon-Endkappen |
WICHTIG: zusätzlich mit Silikon professionell abdichten!



PROFIL


200 CM



COVER 24

max. 6 mm

65 %



COVER 25

max. 4,5 mm

65 %

NUR MIT KÜHLSTREIFEN

PROFIL

■ 2 m 113634

■ 2 m 114785

ABDECKUNGEN & ENDKAPPEN

COVER 24

65 % | opal/satiniert

2 m 113648

6 m 113649

ENDKAPPEN

COVER 24 | Silikon

■ EC64 113636 | Kabel EC65 113637

COVER 25 IP54



65 % | opal/satiniert

2 m 113659

2,6 m 113660

KÜHLSTREIFEN

2 m 113635

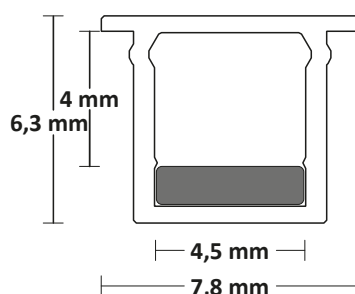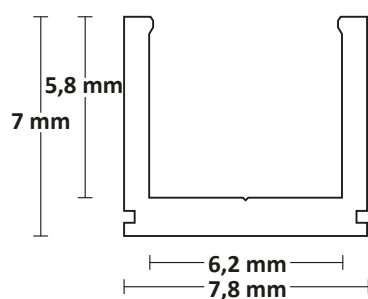

COVER 25
MIT KÜHLSTREIFEN



SURF6

LED Surface mount profile

■ SILVER ■ BLACK RAL 9005



max.
6 mm




MADE-TO-MEASURE CONFECTIONERY &
OEM PRODUCTION ON REQUEST

Up to 6 m | RAL colours


Cooling mass: 45 g/m | Particularly narrow and flat LED aluminium profile, which can be ideally integrated into tile concepts due to its dimensions (7.8 x 7 mm - w x h).

For installation in wet and outdoor areas: PC cover + cooling strips + silicone end caps | **IMPORTANT:** additionally seal professionally with silicone!



PROFILE


200 CM



COVER 24

max. 6 mm

65 %



COVER 25

max. 4,5 mm

65 %

ONLY WITH
COOLING STRIP

PROFILE

■ 2 m 113634

■ 2 m 114785

COVERS & END CAPS

COVER 24

65 % | opal/satinised

2 m 113648

6 m 113649

END CAPS

COVER 24 | Silicone

■ EC64 113636 | Cable EC65 113637

COVER 25 IP54



65 % | opal/satinised

2 m 113659

2,6 m 113660

COOLING STRIP

2 m 113635

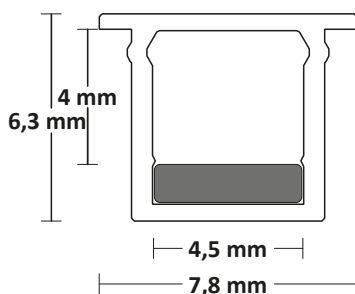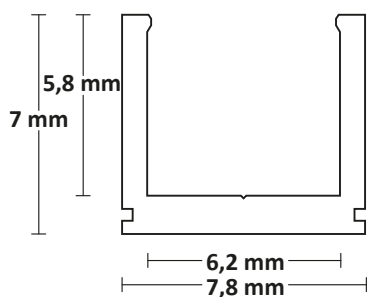

COVER 25
WITH COOLING STRIP

